


DO NOT SCALE

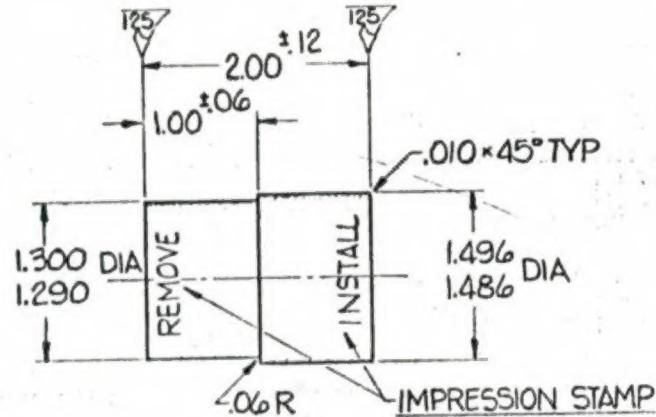

269A\9279
KIT

REVISED

SYM	E.O.'S	DESCRIPTION	DRWN	APP'D	DATE

NOTES:

1. IDENTIFY PER HP 8-5 (IMPRESSION STAMP)
2. H.T. TO Rc 34-38 PER HPI-1
3. BLACK OXIDE PER HP4-50

2K40

REDUCED SIZE PRINT

REQD	PART NO.	REQD	PART NO.	NAME	SIZE	DESCRIPTION	MIL-S-6758 COND OPT
ASSEMBLY OPP.		ASSEMBLY SHOWN		LIST OF MATERIAL			SPECIFICATION
			UNLESS OTHERWISE SPECIFIED	DRWN BENEFIEL	3/16"		
			DIMENSIONAL TOLERANCES	CHK'D.	1/16"		
			3 PLACE DECIMAL $\pm .010$	APP'D			
			2 PLACE DECIMAL $\pm .03$	APP'D			
			ANGULAR $\pm 0^{\circ}30'$	APP'D			
			DIMENSIONS TO BE MET BEFORE PLATING.	APP'D			
			CORNER RADIUS .062 ON C' BORES AND SPOT FACES OF 1.250 DIA. OR LESS — .03 RADIUS ON GREATER THAN 1.250 DIA.	APP'D		SCALE FILL	CODE 02731 SHEET 1 OF 1
NEXT ASSY	USED ON	NEXT ASSY	FINAL ASSY				
APPLICATION	QTY REQD						

BESTER HIGH-POINT CLEARPRINT 3000H-B